


MAXIMO

# Radial 65 Radial 70 Radial 85



# Maximo Radial 65

The new Radial 65 range is designed for tractors up to 180 hp. It provides excellent performance, both in the field and on the road. The tread pattern design guarantees gentle ground handling and high traction capability. With its large footprint area and optimal pressure distribution, the tire prevents soil compaction, leading to higher field productivity.

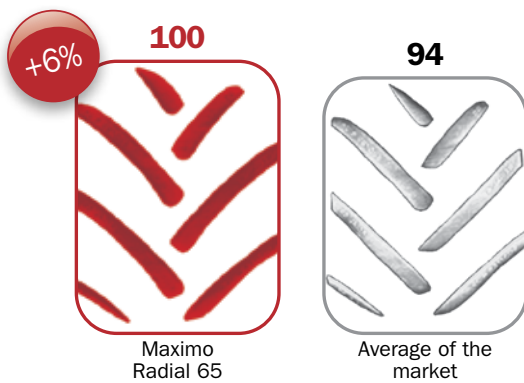

On the road, the Radial 65 ensures easy handling and great comfort, even at high speed. Lower rolling resistance reduces fuel consumption, while the lug shape maximizes wear resistance, delivering long-lasting tires.




# Maximo Radial 70

The Radial 70 range boasts a larger tread width compared to the equivalent products available in the marketplace. This is achievable through an advanced mould design, as well as through the perfect balance between the structure and flexibility of the tires.

The wide and long footprint results in excellent flotation properties, boosting yields and reducing crop stress.

The large footprint area minimizes the soil compaction and ensures outstanding traction.

Tread width (index)

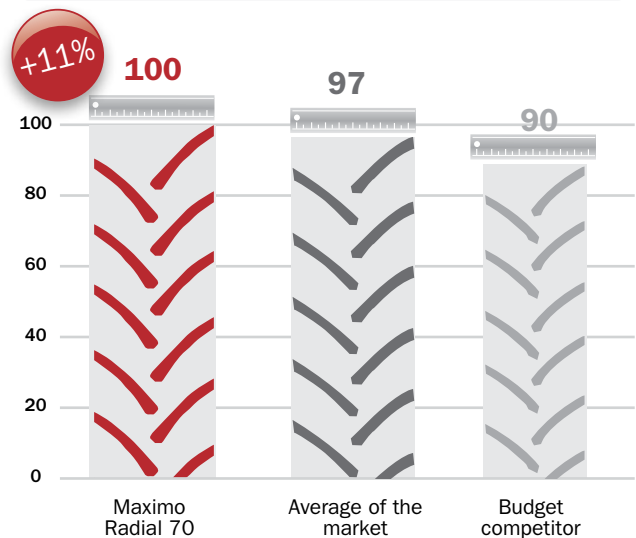

**MAXIMO** Radial 70 guarantees high comfort levels for the driver due to the flexible sidewall.

The longer service life of Radial 70, the great traction, as well as the good handling on the road makes the new range the right choice for reduced working time and high cost efficiency.







# Maximo Radial 85

The Radial 85 is the ideal multipurpose tire for medium and powered tractors both for field and road application.

The combination of radial technology and tread design provides the **MAXIMO** range with a longer footprint area than the average of the market (+ 5%), for minimum soil compaction and excellent farm productivity.

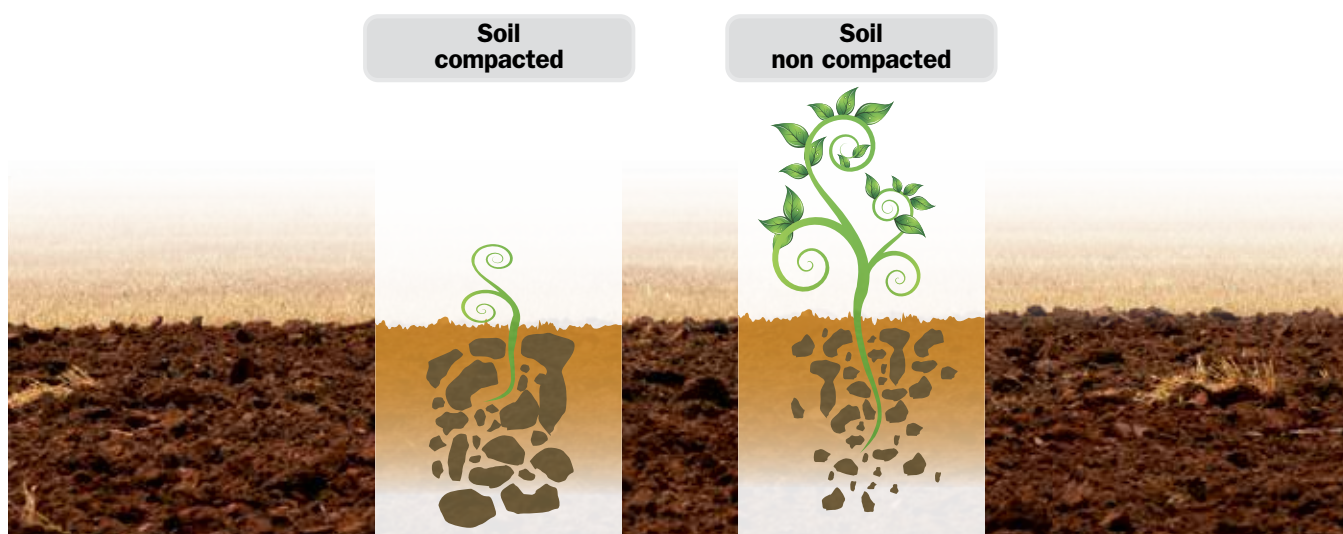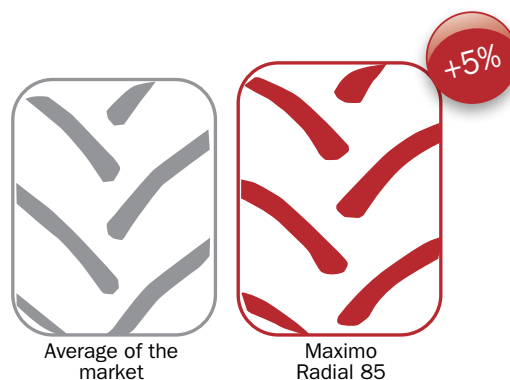

The unique shape and angle of the lugs of the **MAXIMO** Radial 85 range, guarantee traction capacity and low slippage, generating outstanding power transmission to the ground.

The special inter-lug “islands” improve the self-cleaning of the tire, minimizing the distance required to release mud from the tread, thereby helping with adherence to road regulations.



The tread geometry and the materials used optimize tractor handling and increase wear resistance on road applications. This gives you important economic benefits and environmental respect. The complete Radial 85 range uses environmentally-friendly extender oils only.

## Technical data

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                               | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|---------------------------------------------|-----------------|--------------------------------|
|                | <b>440/65R24</b><br>128D | <b>Radial 65</b> | <b>435</b> | <b>1185</b> | <b>535</b> | <b>3530</b> |             | <b>DW14L</b> | W13 - W14L<br>W15L (°)<br>DW13<br>DW15L (°) | <b>TUBELESS</b> | <b>14.9-24</b><br><b>TR218</b> |
| Pressure       | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                   | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                  | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1045             | 1210       | 1370        | 1515       | 1660        | <b>1800</b> |              |                                             |                 |                                |
|                | 50 S                     | 1100             | 1270       | 1440        | 1590       | 1740        | 1890        |              |                                             |                 |                                |
|                | 40 S                     | 1145             | 1325       | 1500        | 1660       | 1815        | 1975        |              |                                             |                 |                                |
|                | 30 S                     | 1205             | 1390       | 1575        | 1740       | 1905        | 2070        |              |                                             |                 |                                |
|                | 10 LT S                  | 1420             | 1645       | 1865        | 2060       | 2255        | 2450        | 2620         | 2700                                        | 3060            |                                |
|                | 10 HT S                  | 1205             | 1390       | 1575        | 1740       | 1905        | 2070        |              |                                             |                 |                                |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                                         | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|-------------------------------------------------------|-----------------|--------------------------------|
|                | <b>480/65R24</b><br>133D | <b>Radial 65</b> | <b>480</b> | <b>1235</b> | <b>560</b> | <b>3695</b> | <b>600</b>  | <b>DW15L</b> | W14L - W15L<br>W16L (°)<br>DW14L - DW15L<br>DW16L (°) | <b>TUBELESS</b> | <b>16.9-24</b><br><b>TR218</b> |
| Pressure       | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                             | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                            | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1195             | 1385       | 1570        | 1735       | 1900        | <b>2060</b> |              |                                                       |                 |                                |
|                | 50 S                     | 1255             | 1450       | 1645        | 1820       | 1990        | 2165        |              |                                                       |                 |                                |
|                | 40 S                     | 1310             | 1515       | 1715        | 1895       | 2080        | 2260        |              |                                                       |                 |                                |
|                | 30 S                     | 1375             | 1590       | 1805        | 1990       | 2180        | 2370        |              |                                                       |                 |                                |
|                | 10 LT S                  | 1625             | 1880       | 2130        | 2355       | 2580        | 2805        | 2995         | 3090                                                  | 3505            |                                |
|                | 10 HT S                  | 1375             | 1590       | 1805        | 1990       | 2180        | 2370        |              |                                                       |                 |                                |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                         | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|---------------------------------------|-----------------|--------------------------------|
|                | <b>540/65R24</b><br>140D | <b>Radial 65</b> | <b>530</b> | <b>1315</b> | <b>600</b> | <b>3915</b> | <b>625</b>  | <b>DW16L</b> | W16L<br>W15L (°)<br>W18L<br>DW15L (°) | <b>TUBELESS</b> | <b>16.9-28</b><br><b>TR218</b> |
| Pressure       | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                             | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                            | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1450             | 1675       | 1900        | 2100       | 2300        | <b>2500</b> |              |                                       |                 |                                |
|                | 50 S                     | 1525             | 1760       | 1995        | 2205       | 2415        | 2625        |              |                                       |                 |                                |
|                | 40 S                     | 1590             | 1835       | 2085        | 2300       | 2520        | 2740        |              |                                       |                 |                                |
|                | 30 S                     | 1670             | 1930       | 2185        | 2415       | 2645        | 2875        |              |                                       |                 |                                |
|                | 10 LT S                  | 1975             | 2280       | 2585        | 2860       | 3130        | 3400        | 3635         | 3750                                  | 4250            |                                |
|                | 10 HT S                  | 1670             | 1930       | 2185        | 2415       | 2645        | 2875        |              |                                       |                 |                                |

|                | Size              | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim  | Permitted Rim | Type     | Tube             |
|----------------|-------------------|---------------|-------|-------|--------|-------|------|------|---------------|----------|------------------|
|                | 440/65R28<br>131D | Radial 65     | 435   | 1295  | 585    | 3870  |      | W14L | W13L          | TUBELESS | 16.9-28<br>TR218 |
| Pressure       | psi               | 9             | 12    | 14    | 17     | 20    | 23   | 26   | 28            | 30       |                  |
|                | bar               | 0,6           | 0,8   | 1,0   | 1,2    | 1,4   | 1,6  | 1,8  | 1,9           | 2,1      |                  |
| Max. Load (kg) | 65 S              | 1135          | 1310  | 1485  | 1640   | 1795  | 1950 |      |               |          |                  |
|                | 50 S              | 1190          | 1375  | 1560  | 1720   | 1885  | 2050 |      |               |          |                  |
|                | 40 S              | 1240          | 1435  | 1625  | 1795   | 1965  | 2140 |      |               |          |                  |
|                | 30 S              | 1305          | 1505  | 1705  | 1885   | 2065  | 2245 |      |               |          |                  |
|                | 10 LT S           | 1540          | 1780  | 2020  | 2230   | 2440  | 2655 | 2835 | 2925          | 3315     |                  |
|                | 10 HT S           | 1305          | 1505  | 1705  | 1885   | 2065  | 2245 |      |               |          |                  |

(°) = For these rims please contact the Trelleborg expert in your area

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                                 | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|-----------------------------------------------|-----------------|--------------------------------|
| Pressure       | <b>480/65R28</b><br>136D | <b>Radial 65</b> | <b>480</b> | <b>1345</b> | <b>605</b> | <b>4010</b> | <b>650</b>  | <b>DW15L</b> | W14L - W15L<br>W16L (°)<br>DW14L<br>DW16L (°) | <b>TUBELESS</b> | <b>16.9-28</b><br><b>TR218</b> |
|                | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                     | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                    | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1300             | 1505       | 1705        | 1885       | 2065        | <b>2240</b> |              |                                               |                 |                                |
|                | 50 S                     | 1365             | 1580       | 1790        | 1980       | 2165        | 2355        |              |                                               |                 |                                |
|                | 40 S                     | 1425             | 1645       | 1865        | 2065       | 2260        | 2455        |              |                                               |                 |                                |
|                | 30 S                     | 1495             | 1730       | 1960        | 2165       | 2370        | 2580        |              |                                               |                 |                                |
|                | 10 LT S                  | 1770             | 2045       | 2320        | 2560       | 2805        | 3050        | 3260         | 3360                                          | 3810            |                                |
|                | 10 HT S                  | 1495             | 1730       | 1960        | 2165       | 2370        | 2580        |              |                                               |                 |                                |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                                 | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|-----------------------------------------------|-----------------|--------------------------------|
| Pressure       | <b>540/65R28</b><br>142D | <b>Radial 65</b> | <b>525</b> | <b>1413</b> | <b>637</b> | <b>4250</b> | <b>675</b>  | <b>DW16L</b> | W15L (°)<br>W16L - W18L<br>DW15L (°)<br>DW18L | <b>TUBELESS</b> | <b>16.9-28</b><br><b>TR218</b> |
|                | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                     | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                    | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1540             | 1780       | 2015        | 2230       | 2440        | <b>2650</b> |              |                                               |                 |                                |
|                | 50 S                     | 1615             | 1865       | 2115        | 2340       | 2560        | 2785        |              |                                               |                 |                                |
|                | 40 S                     | 1685             | 1945       | 2210        | 2440       | 2670        | 2905        |              |                                               |                 |                                |
|                | 30 S                     | 1770             | 2045       | 2320        | 2560       | 2805        | 3050        |              |                                               |                 |                                |
|                | 10 LT S                  | 2095             | 2415       | 2740        | 3030       | 3320        | 3605        | 3855         | 3975                                          | 4505            |                                |
|                | 10 HT S                  | 1770             | 2045       | 2320        | 2560       | 2805        | 3050        |              |                                               |                 |                                |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                                 | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|-----------------------------------------------|-----------------|--------------------------------|
| Pressure       | <b>540/65R30</b><br>143D | <b>Radial 65</b> | <b>530</b> | <b>1470</b> | <b>670</b> | <b>4380</b> | <b>700</b>  | <b>DW16L</b> | W15L (°)<br>W16L - W18L<br>DW15L (°)<br>DW18L | <b>TUBELESS</b> | <b>18.4-38</b><br><b>TR218</b> |
|                | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                     | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                    | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1585             | 1830       | 2075        | 2290       | 2510        | <b>2725</b> |              |                                               |                 |                                |
|                | 50 S                     | 1660             | 1920       | 2175        | 2405       | 2635        | 2865        |              |                                               |                 |                                |
|                | 40 S                     | 1735             | 2000       | 2270        | 2510       | 2750        | 2985        |              |                                               |                 |                                |
|                | 30 S                     | 1820             | 2100       | 2385        | 2635       | 2885        | 3135        |              |                                               |                 |                                |
|                | 10 LT S                  | 2150             | 2485       | 2820        | 3115       | 3410        | 3710        | 3965         | 4090                                          | 4635            |                                |
|                | 10 HT S                  | 1820             | 2100       | 2385        | 2635       | 2885        | 3135        |              |                                               |                 |                                |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                                 | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|-----------------------------------------------|-----------------|--------------------------------|
| Pressure       | <b>540/65R34</b><br>145D | <b>Radial 65</b> | <b>520</b> | <b>1580</b> | <b>710</b> | <b>4710</b> | <b>750</b>  | <b>DW16L</b> | W15L (°)<br>W16L - W18L<br>DW15L (°)<br>DW18L | <b>TUBELESS</b> | <b>16.9-34</b><br><b>TR218</b> |
|                | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                     | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                    | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 1685             | 1945       | 2205        | 2440       | 2670        | <b>2900</b> |              |                                               |                 |                                |
|                | 50 S                     | 1770             | 2045       | 2315        | 2560       | 2805        | 3045        |              |                                               |                 |                                |
|                | 40 S                     | 1845             | 2130       | 2415        | 2670       | 2925        | 3180        |              |                                               |                 |                                |
|                | 30 S                     | 1935             | 2235       | 2535        | 2805       | 3070        | 3335        |              |                                               |                 |                                |
|                | 10 LT S                  | 2290             | 2645       | 3000        | 3315       | 3630        | 3945        | 4220         | 4350                                          | 4930            |                                |
|                | 10 HT S                  | 1935             | 2235       | 2535        | 2805       | 3070        | 3335        |              |                                               |                 |                                |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim | Type            | Tube |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|---------------|-----------------|------|
| Pressure       | <b>600/65R34</b><br>151D | <b>Radial 65</b> | <b>610</b> | <b>1650</b> | <b>750</b> | <b>4935</b> | <b>775</b>  | <b>DW20B</b> | DW18L<br>W18L | <b>TUBELESS</b> |      |
|                | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>     | <b>30</b>       |      |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>    | <b>2,1</b>      |      |
| Max. Load (kg) | <b>65 S</b>              | 2005             | 2315       | 2625        | 2900       | 3175        | <b>3450</b> |              |               |                 |      |
|                | 50 S                     | 2105             | 2430       | 2755        | 3045       | 3335        | 3625        |              |               |                 |      |
|                | 40 S                     | 2195             | 2535       | 2875        | 3175       | 3480        | 3780        |              |               |                 |      |
|                | 30 S                     | 2305             | 2660       | 3020        | 3335       | 3655        | 3970        |              |               |                 |      |
|                | 10 LT S                  | 2725             | 3145       | 3570        | 3945       | 4320        | 4695        | 5020         | 5175          | 5865            |      |
|                | 10 HT S                  | 2305             | 2660       | 3020        | 3335       | 3655        | 3970        |              |               |                 |      |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim                                           | Type            | Tube                     |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|---------------------------------------------------------|-----------------|--------------------------|
|                | <b>540/65R38</b><br>147D | <b>Radial 65</b> | <b>530</b> | <b>1680</b> | <b>760</b> | <b>5010</b> | <b>800</b>  | <b>DW16L</b> | <b>W15L (°)<br/>W16L - W18L<br/>DW15L (°)<br/>DW18L</b> | <b>TUBELESS</b> | <b>18.4-38<br/>TR218</b> |
| Pressure       | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>                                               | <b>30</b>       |                          |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>                                              | <b>2,1</b>      |                          |
| Max. Load (kg) | <b>65 S</b>              | 1790             | 2065       | 2345        | 2590       | 2835        | <b>3080</b> |              |                                                         |                 |                          |
|                | 50 S                     | 1880             | 2170       | 2460        | 2720       | 2980        | 3235        |              |                                                         |                 |                          |
|                | 40 S                     | 1960             | 2260       | 2565        | 2835       | 3105        | 3375        |              |                                                         |                 |                          |
|                | 30 S                     | 2055             | 2375       | 2695        | 2980       | 3260        | 3545        |              |                                                         |                 |                          |
|                | 10 LT S                  | 2430             | 2810       | 3185        | 3520       | 3855        | 4190        | 4480         | 4620                                                    | 5240            |                          |
|                | 10 HT S                  | 2055             | 2375       | 2695        | 2980       | 3260        | 3545        |              |                                                         |                 |                          |

|                | Size              | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim   | Permitted Rim | Type     | Tube             |
|----------------|-------------------|---------------|-------|-------|--------|-------|------|-------|---------------|----------|------------------|
|                | 600/65R38<br>153D | Radial 65     | 590   | 1770  | 800    | 5285  | 825  | DW18L | W18L<br>DW20B | TUBELESS | 20.8-38<br>TR218 |
| Pressure       | psi               | 9             | 12    | 14    | 17     | 20    | 23   | 26    | 28            | 30       |                  |
|                | bar               | 0,6           | 0,8   | 1,0   | 1,2    | 1,4   | 1,6  | 1,8   | 1,9           | 2,1      |                  |
| Max. Load (kg) | 65 S              | 2125          | 2455  | 2785  | 3075   | 3370  | 3660 |       |               |          |                  |
|                | 50 S              | 2230          | 2575  | 2925  | 3230   | 3540  | 3845 |       |               |          |                  |
|                | 40 S              | 2325          | 2690  | 3050  | 3370   | 3690  | 4010 |       |               |          |                  |
|                | 30 S              | 2445          | 2825  | 3200  | 3540   | 3875  | 4210 |       |               |          |                  |
|                | 10 LT S           | 2890          | 3335  | 3785  | 4185   | 4580  | 4980 | 5325  | 5490          | 6225     |                  |
|                | 10 HT S           | 2445          | 2825  | 3200  | 3540   | 3875  | 4210 |       |               |          |                  |

|                | Size              | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim   | Permitted Rim         | Type     | Tube             |
|----------------|-------------------|---------------|-------|-------|--------|-------|------|-------|-----------------------|----------|------------------|
|                | 650/65R38<br>157D | Radial 65     | 650   | 1825  | 815    | 5410  | 875  | DW20B | W18L (°)<br>DW18L (°) | TUBELESS | 20.8-38<br>TR218 |
| Pressure       | psi               | 9             | 12    | 14    | 17     | 20    | 23   | 26    | 28                    | 30       |                  |
|                | bar               | 0,6           | 0,8   | 1,0   | 1,2    | 1,4   | 1,6  | 1,8   | 1,9                   | 2,1      |                  |
| Max. Load (kg) | 65 S              | 2395          | 2765  | 3135  | 3465   | 3795  | 4125 |       |                       |          |                  |
|                | 50 S              | 2515          | 2905  | 3295  | 3640   | 3985  | 4335 |       |                       |          |                  |
|                | 40 S              | 2620          | 3030  | 3435  | 3795   | 4160  | 4520 |       |                       |          |                  |
|                | 30 S              | 2755          | 3180  | 3610  | 3985   | 4365  | 4745 |       |                       |          |                  |
|                | 10 LT S           | 3255          | 3760  | 4265  | 4715   | 5165  | 5610 | 6000  | 6190                  | 7015     |                  |
|                | 10 HT S           | 2755          | 3180  | 3610  | 3985   | 4365  | 4745 |       |                       |          |                  |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim          | Permitted Rim | Type            | Tube       |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|------------|--------------|---------------|-----------------|------------|
|                | <b>650/65R38</b><br>166D | <b>Radial 65</b> | <b>650</b> | <b>1820</b> | <b>825</b> | <b>5525</b> | <b>875</b> | <b>DW20B</b> |               | <b>TUBELESS</b> |            |
| Pressure       | <b>psi</b>               | <b>12</b>        | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>29</b>  | <b>35</b>    | <b>41</b>     | <b>46</b>       | <b>49</b>  |
|                | <b>bar</b>               | <b>0,8</b>       | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>2</b>   | <b>2,4</b>   | <b>2,8</b>    | <b>3,2</b>      | <b>3,4</b> |
| Max. Load (kg) | <b>65 S</b>              | 2650             | 3025       | 3395        | 3765       | 4135        | 4560       | 4825         | <b>5300</b>   |                 |            |
|                | 50 S                     | 2785             | 3180       | 3565        | 3955       | 4345        | 4790       | 5070         | 5565          |                 |            |
|                | 40 S                     | 2905             | 3315       | 3720        | 4125       | 4530        | 4995       | 5285         | 5805          |                 |            |
|                | 30 S                     | 3050             | 3480       | 3905        | 4330       | 4760        | 5245       | 5550         | 6095          |                 |            |
|                | 10 LT S                  | 3285             | 3745       | 4330        | 4915       | 5475        | 6385       | 6785         | 7455          | 7635            | 7950       |
|                | 10 HT S                  | 3050             | 3480       | 3905        | 4330       | 4760        | 5245       | 5550         | 6095          |                 |            |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI         | Rim          | Permitted Rim | Type            | Tube                           |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|-------------|--------------|---------------|-----------------|--------------------------------|
|                | <b>650/65R42</b><br>158D | <b>Radial 65</b> | <b>650</b> | <b>1920</b> | <b>870</b> | <b>5730</b> | <b>925</b>  | <b>DW20B</b> | <b>DW18L</b>  | <b>TUBELESS</b> | <b>20.8-42</b><br><b>TR218</b> |
| Pressure       | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>14</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>   | <b>26</b>    | <b>28</b>     | <b>30</b>       |                                |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b>  | <b>1,8</b>   | <b>1,9</b>    | <b>2,1</b>      |                                |
| Max. Load (kg) | <b>65 S</b>              | 2465             | 2850       | 3230        | 3570       | 3910        | <b>4250</b> |              |               |                 |                                |
|                | 50 S                     | 2590             | 2990       | 3395        | 3750       | 4110        | 4465        |              |               |                 |                                |
|                | 40 S                     | 2700             | 3120       | 3540        | 3910       | 4285        | 4655        |              |               |                 |                                |
|                | 30 S                     | 2835             | 3275       | 3715        | 4110       | 4500        | 4890        |              |               |                 |                                |
|                | 10 LT S                  | 3355             | 3875       | 4395        | 4860       | 5320        | 5780        | 6180         | 6375          | 7225            |                                |
|                | 10 HT S                  | 2835             | 3275       | 3715        | 4110       | 4500        | 4890        |              |               |                 |                                |

(°) = For these rims please contact the Trelleborg expert in your area

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                             | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-------------------------------------------|-----------------|--------------------------|
|                | <b>360/70R24</b><br>122A8 122B | <b>Radial 70</b> | <b>352</b> | <b>1152</b> | <b>518</b> | <b>3455</b> | <b>550</b> | <b>W11</b>  | <b>W10 - W12<br/>DW10 - DW11<br/>DW12</b> | <b>TUBELESS</b> | <b>13.6-24<br/>TR218</b> |
| Pressure       | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                 | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 825        | 960         | 1095       | 1230        | 1365       | 1500        |                                           |                 |                          |
|                | <b>40 S</b>                    |                  | 825        | 960         | 1095       | 1230        | 1365       | <b>1500</b> |                                           |                 |                          |
|                | 30 S                           |                  | 885        | 1025        | 1170       | 1315        | 1460       | 1605        |                                           |                 |                          |
|                | 10 LT S                        | 920              | 1120       | 1305        | 1490       | 1675        | 1855       | 2040        | 2185                                      | 2245            | 2550                     |
|                | 10 HT S                        |                  | 885        | 1025        | 1170       | 1315        | 1460       | 1605        |                                           |                 |                          |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                             | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-------------------------------------------|-----------------|--------------------------|
|                | <b>380/70R24</b><br>125A8 125B | <b>Radial 70</b> | <b>384</b> | <b>1194</b> | <b>535</b> | <b>3580</b> | <b>575</b> | <b>W12</b>  | <b>W11 - W13<br/>DW11 - DW12<br/>DW13</b> | <b>TUBELESS</b> | <b>14.9-24<br/>TR218</b> |
| Pressure       | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                 | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 910        | 1055        | 1205       | 1355        | 1500       | 1650        |                                           |                 |                          |
|                | <b>40 S</b>                    |                  | 910        | 1055        | 1205       | 1355        | 1500       | <b>1650</b> |                                           |                 |                          |
|                | 30 S                           |                  | 970        | 1130        | 1290       | 1450        | 1605       | 1765        |                                           |                 |                          |
|                | 10 LT S                        | 1010             | 1235       | 1435        | 1640       | 1840        | 2040       | 2245        | 2400                                      | 2470            | 2805                     |
|                | 10 HT S                        |                  | 970        | 1130        | 1290       | 1450        | 1605       | 1765        |                                           |                 |                          |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                               | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------------------|-----------------|--------------------------|
|                | <b>420/70R24</b><br>130A8 130B | <b>Radial 70</b> | <b>422</b> | <b>1256</b> | <b>562</b> | <b>3765</b> | <b>600</b> | <b>W13</b>  | <b>W12 - W14L<br/>DW12 - DW13<br/>DW14L</b> | <b>TUBELESS</b> | <b>16.9-24<br/>TR218</b> |
| Pressure       | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                   | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                  | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 1045       | 1215        | 1385       | 1560        | 1730       | 1900        |                                             |                 |                          |
|                | <b>40 S</b>                    |                  | 1045       | 1215        | 1385       | 1560        | 1730       | <b>1900</b> |                                             |                 |                          |
|                | 30 S                           |                  | 1120       | 1300        | 1485       | 1665        | 1850       | 2035        |                                             |                 |                          |
|                | 10 LT S                        | 1165             | 1420       | 1655        | 1885       | 2120        | 2350       | 2585        | 2765                                        | 2840            | 3230                     |
|                | 10 HT S                        |                  | 1120       | 1300        | 1485       | 1665        | 1850       | 2035        |                                             |                 |                          |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                                    | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|--------------------------------------------------|-----------------|--------------------------|
|                | <b>480/70R24</b><br>138A8 138B | <b>Radial 70</b> | <b>468</b> | <b>1318</b> | <b>590</b> | <b>3950</b> | <b>625</b> | <b>W15L</b> | <b>W14L - W16L<br/>DW14L<br/>DW15L<br/>DW16L</b> | <b>TUBELESS</b> | <b>16.9-24<br/>TR218</b> |
| Pressure       | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                        | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                       | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 1300       | 1510        | 1725       | 1935        | 2150       | 2360        |                                                  |                 |                          |
|                | <b>40 S</b>                    |                  | 1300       | 1510        | 1725       | 1935        | 2150       | <b>2360</b> |                                                  |                 |                          |
|                | 30 S                           |                  | 1390       | 1615        | 1845       | 2070        | 2300       | 2525        |                                                  |                 |                          |
|                | 10 LT S                        | 1445             | 1765       | 2055        | 2345       | 2630        | 2920       | 3210        | 3435                                             | 3530            | 4010                     |
|                | 10 HT S                        |                  | 1390       | 1615        | 1845       | 2070        | 2300       | 2525        |                                                  |                 |                          |



|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                             | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>380/70R28</b><br>127A8 127B | <b>Radial 70</b> | <b>375</b> | <b>1295</b> | <b>585</b> | <b>3890</b> | <b>625</b> | <b>W12</b>  | <b>W11 - W13<br/>DW11 - DW12<br/>DW13</b> | <b>TUBELESS</b> | <b>12.4-28<br/>TR218</b> |
|                | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                 | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 965        | 1120        | 1280       | 1435        | 1595       | 1750        |                                           |                 |                          |
|                | <b>40 S</b>                    |                  | 965        | 1120        | 1280       | 1435        | 1595       | <b>1750</b> |                                           |                 |                          |
|                | 30 S                           |                  | 1030       | 1200        | 1365       | 1535        | 1705       | 1875        |                                           |                 |                          |
|                | 10 LT S                        | 1070             | 1310       | 1525        | 1735       | 1950        | 2165       | 2380        | 2545                                      | 2620            | 2975                     |
|                | 10 HT S                        |                  | 1030       | 1200        | 1365       | 1535        | 1705       | 1875        |                                           |                 |                          |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                               | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>420/70R28</b><br>133A8 133B | <b>Radial 70</b> | <b>423</b> | <b>1354</b> | <b>605</b> | <b>4060</b> | <b>650</b> | <b>W13</b>  | <b>W12 - W14L<br/>DW12 - DW13<br/>DW14L</b> | <b>TUBELESS</b> | <b>16.9-28<br/>TR218</b> |
|                | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                   | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                  | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 1135       | 1320        | 1505       | 1690        | 1875       | 2060        |                                             |                 |                          |
|                | <b>40 S</b>                    |                  | 1135       | 1320        | 1505       | 1690        | 1875       | <b>2060</b> |                                             |                 |                          |
|                | 30 S                           |                  | 1210       | 1410        | 1610       | 1805        | 2005       | 2205        |                                             |                 |                          |
|                | 10 LT S                        | 1260             | 1540       | 1795        | 2045       | 2295        | 2550       | 2800        | 3000                                        | 3080            | 3500                     |
|                | 10 HT S                        |                  | 1210       | 1410        | 1610       | 1805        | 2005       | 2205        |                                             |                 |                          |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                                    | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|--------------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>480/70R28</b><br>140A8 140B | <b>Radial 70</b> | <b>478</b> | <b>1423</b> | <b>636</b> | <b>4270</b> | <b>675</b> | <b>W15L</b> | <b>W14L - W16L<br/>DW14L<br/>DW15L<br/>DW16L</b> | <b>TUBELESS</b> | <b>16.9-28<br/>TR218</b> |
|                | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                        | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                       | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 1375       | 1600        | 1825       | 2050        | 2275       | 2500        |                                                  |                 |                          |
|                | <b>40 S</b>                    |                  | 1375       | 1600        | 1825       | 2050        | 2275       | <b>2500</b> |                                                  |                 |                          |
|                | 30 S                           |                  | 1470       | 1710        | 1955       | 2195        | 2435       | 2675        |                                                  |                 |                          |
|                | 10 LT S                        | 1530             | 1870       | 2175        | 2480       | 2790        | 3095       | 3400        | 3640                                             | 3740            | 4250                     |
|                | 10 HT S                        |                  | 1470       | 1710        | 1955       | 2195        | 2435       | 2675        |                                                  |                 |                          |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                                    | Type            | Tube                     |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|--------------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>480/70R30</b><br>141A8 141B | <b>Radial 70</b> | <b>472</b> | <b>1478</b> | <b>662</b> | <b>4435</b> | <b>700</b> | <b>W15L</b> | <b>W14L - W16L<br/>DW14L<br/>DW15L<br/>DW16L</b> | <b>TUBELESS</b> | <b>18.4-30<br/>TR218</b> |
|                | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                        | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                       | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                           |                  | 1415       | 1650        | 1880       | 2110        | 2345       | 2575        |                                                  |                 |                          |
|                | <b>40 S</b>                    |                  | 1415       | 1650        | 1880       | 2110        | 2345       | <b>2575</b> |                                                  |                 |                          |
|                | 30 S                           |                  | 1515       | 1765        | 2010       | 2260        | 2505       | 2755        |                                                  |                 |                          |
|                | 10 LT S                        | 1575             | 1925       | 2240        | 2555       | 2870        | 3185       | 3500        | 3745                                             | 3850            | 4380                     |
|                | 10 HT S                        |                  | 1515       | 1765        | 2010       | 2260        | 2505       | 2755        |                                                  |                 |                          |

|                | Size                           | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim         | Permitted Rim                         | Type     | Tube             |
|----------------|--------------------------------|---------------|-------|-------|--------|-------|------|-------------|---------------------------------------|----------|------------------|
|                | <b>480/70R34</b><br>143A8 143B | Radial 70     | 480   | 1580  | 705    | 4740  | 750  | W15L        | W14L - W16L<br>DW14L<br>DW15L - DW16L | TUBELESS | 16.9-34<br>TR218 |
| Pressure       | psi                            | 6             | 9     | 12    | 14     | 17    | 20   | 23          | 26                                    | 28       | 30               |
|                | bar                            | 0,4           | 0,6   | 0,8   | 1,0    | 1,2   | 1,4  | 1,6         | 1,8                                   | 1,9      | 2,1              |
| Max. Load (kg) | 50 S                           |               | 1500  | 1745  | 1990   | 2235  | 2480 | 2725        |                                       |          |                  |
|                | <b>40 S</b>                    |               | 1500  | 1745  | 1990   | 2235  | 2480 | <b>2725</b> |                                       |          |                  |
|                | 30 S                           |               | 1605  | 1865  | 2130   | 2390  | 2655 | 2915        |                                       |          |                  |
|                | 10 LT S                        | 1670          | 2040  | 2370  | 2705   | 3040  | 3370 | 3705        | 3965                                  | 4075     | 4635             |
|                | 10 HT S                        |               | 1605  | 1865  | 2130   | 2390  | 2655 | 2915        |                                       |          |                  |

|                | Size                           | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim         | Permitted Rim                | Type     | Tube             |
|----------------|--------------------------------|---------------|-------|-------|--------|-------|------|-------------|------------------------------|----------|------------------|
|                | <b>520/70R34</b><br>148A8 148B | Radial 70     | 516   | 1640  | 730    | 4920  | 775  | W16L        | W15L - W18L<br>DW15L - DW16L | TUBELESS | 16.9-34<br>TR218 |
| Pressure       | psi                            | 6             | 9     | 12    | 14     | 17    | 20   | 23          | 26                           | 28       | 30               |
|                | bar                            | 0,4           | 0,6   | 0,8   | 1,0    | 1,2   | 1,4  | 1,6         | 1,8                          | 1,9      | 2,1              |
| Max. Load (kg) | 50 S                           |               | 1735  | 2015  | 2300   | 2585  | 2865 | 3150        |                              |          |                  |
|                | <b>40 S</b>                    |               | 1735  | 2015  | 2300   | 2585  | 2865 | <b>3150</b> |                              |          |                  |
|                | 30 S                           |               | 1855  | 2155  | 2460   | 2765  | 3065 | 3370        |                              |          |                  |
|                | 10 LT S                        | 1930          | 2355  | 2740  | 3125   | 3515  | 3900 | 4285        | 4585                         | 4710     | 5355             |
|                | 10 HT S                        |               | 1855  | 2155  | 2460   | 2765  | 3065 | 3370        |                              |          |                  |

|                | Size                           | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim         | Permitted Rim                         | Type     | Tube             |
|----------------|--------------------------------|---------------|-------|-------|--------|-------|------|-------------|---------------------------------------|----------|------------------|
|                | <b>480/70R38</b><br>145A8 145B | Radial 70     | 474   | 1680  | 750    | 5045  | 800  | W15L        | W14L - W16L<br>DW14L - DW15L<br>DW16L | TUBELESS | 18.4-38<br>TR218 |
| Pressure       | psi                            | 6             | 9     | 12    | 14     | 17    | 20   | 23          | 26                                    | 28       | 30               |
|                | bar                            | 0,4           | 0,6   | 0,8   | 1,0    | 1,2   | 1,4  | 1,6         | 1,8                                   | 1,9      | 2,1              |
| Max. Load (kg) | 50 S                           |               | 1595  | 1855  | 2115   | 2380  | 2640 | 2900        |                                       |          |                  |
|                | <b>40 S</b>                    |               | 1595  | 1855  | 2115   | 2380  | 2640 | <b>2900</b> |                                       |          |                  |
|                | 30 S                           |               | 1705  | 1985  | 2265   | 2545  | 2825 | 3105        |                                       |          |                  |
|                | 10 LT S                        | 1775          | 2170  | 2525  | 2880   | 3235  | 3590 | 3945        | 4220                                  | 4340     | 4930             |
|                | 10 HT S                        |               | 1705  | 1985  | 2265   | 2545  | 2825 | 3105        |                                       |          |                  |

|                | Size                           | Tread Pattern | SW mm | OD mm | SLR mm | RC mm | SRI  | Rim         | Permitted Rim                         | Type     | Tube             |
|----------------|--------------------------------|---------------|-------|-------|--------|-------|------|-------------|---------------------------------------|----------|------------------|
|                | <b>520/70R38</b><br>150A8 150B | Radial 70     | 530   | 1755  | 781    | 5280  | 825  | W16         | W15L - W18L<br>DW15L - DW16L<br>DW18L | TUBELESS | 18.4-38<br>TR218 |
| Pressure       | psi                            | 6             | 9     | 12    | 14     | 17    | 20   | 23          | 26                                    | 28       | 30               |
|                | bar                            | 0,4           | 0,6   | 0,8   | 1,0    | 1,2   | 1,4  | 1,6         | 1,8                                   | 1,9      | 2,1              |
| Max. Load (kg) | 50 S                           |               | 1845  | 2145  | 2445   | 2745  | 3050 | 3350        |                                       |          |                  |
|                | <b>40 S</b>                    |               | 1845  | 2145  | 2445   | 2745  | 3050 | <b>3350</b> |                                       |          |                  |
|                | 30 S                           |               | 1970  | 2295  | 2615   | 2940  | 3260 | 3585        |                                       |          |                  |
|                | 10 LT S                        | 2050          | 2505  | 2915  | 3325   | 3735  | 4145 | 4555        | 4875                                  | 5010     | 5695             |
|                | 10 HT S                        |               | 1970  | 2295  | 2615   | 2940  | 3260 | 3585        |                                       |          |                  |

|                | Size                           | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim | Type            | Tube                 |
|----------------|--------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------|-----------------|----------------------|
| Pressure       | <b>580/70R38</b><br>155A8 155B | <b>Radial 70</b> | <b>584</b> | <b>1840</b> | <b>820</b> | <b>5525</b> | <b>875</b> | <b>W18L</b> | <b>DW18L</b>  | <b>TUBELESS</b> | <b>20.8-38 TR218</b> |
|                | <b>psi</b>                     | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>14</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>     | <b>28</b>       | <b>30</b>            |
|                | <b>bar</b>                     | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>    | <b>1,9</b>      | <b>2,1</b>           |
| Max. Load (kg) | 50 S                           |                  | 2130       | 2480        | 2830       | 3180        | 3525       | 3875        |               |                 |                      |
|                | <b>40 S</b>                    |                  | 2130       | 2480        | 2830       | 3180        | 3525       | <b>3875</b> |               |                 |                      |
|                | 30 S                           |                  | 2280       | 2655        | 3025       | 3400        | 3775       | 4145        |               |                 |                      |
|                | 10 LT S                        | 2370             | 2900       | 3375        | 3845       | 4320        | 4795       | 5270        | 5640          | 5795            | 6585                 |
|                | 10 HT S                        |                  | 2280       | 2655        | 3025       | 3400        | 3775       | 4145        |               |                 |                      |

|                | Size                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim          | Permitted Rim     | Type            | Tube       |
|----------------|--------------------------|------------------|------------|-------------|------------|-------------|------------|--------------|-------------------|-----------------|------------|
| Pressure       | <b>620/70R42</b><br>166D | <b>Radial 70</b> | <b>620</b> | <b>1940</b> | <b>865</b> | <b>5820</b> | <b>925</b> | <b>DW20B</b> | <b>DW18L W18L</b> | <b>TUBELESS</b> |            |
|                | <b>psi</b>               | <b>9</b>         | <b>12</b>  | <b>15</b>   | <b>17</b>  | <b>20</b>   | <b>23</b>  | <b>29</b>    | <b>35</b>         | <b>41</b>       | <b>44</b>  |
|                | <b>bar</b>               | <b>0,6</b>       | <b>0,8</b> | <b>1,0</b>  | <b>1,2</b> | <b>1,4</b>  | <b>1,6</b> | <b>2,0</b>   | <b>2,4</b>        | <b>2,8</b>      | <b>3,0</b> |
| Max. Load (kg) | 65 S                     | 2495             | 2865       | 3290        | 3710       | 4135        | 4560       | 4985         | <b>5300</b>       |                 |            |
|                | <b>50 S</b>              | 2620             | 3010       | 3455        | 3900       | 4345        | 4790       | 5235         | 5565              |                 |            |
|                | 40 S                     | 2730             | 3135       | 3600        | 4065       | 4530        | 4995       | 5460         | 5805              |                 |            |
|                | 30 S                     | 2865             | 3295       | 3780        | 4270       | 4755        | 5245       | 5730         | 6095              |                 |            |
|                | 10 LT S                  | 3390             | 3895       | 4470        | 5050       | 5625        | 6200       | 6780         | 7210              | 7715            | 9010       |
|                | 10 HT S                  | 2865             | 3295       | 3780        | 4270       | 4755        | 5245       | 5730         | 6095              |                 |            |

|                | Size                                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim       | Type            | Tube                 |
|----------------|------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------|-----------------|----------------------|
| Pressure       | <b>280/85R24</b><br>115A8 112B (11.2R24) | <b>Radial 85</b> | <b>290</b> | <b>1090</b> | <b>490</b> | <b>3260</b> | <b>525</b> | <b>W10</b>  | <b>W9 - W8 DW10</b> | <b>TUBELESS</b> | <b>11.2-24 TR218</b> |
|                | <b>psi</b>                               | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>           | <b>28</b>       | <b>30</b>            |
|                | <b>bar</b>                               | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>          | <b>1,9</b>      | <b>2,1</b>           |
| Max. Load (kg) | 50 S                                     |                  | 740        | 815         | 890        | 965         | 1035       | 1120        |                     |                 |                      |
|                | <b>40 S</b>                              |                  | 810        | 895         | 975        | 1055        | 1135       | <b>1215</b> |                     |                 |                      |
|                | 30 S                                     |                  | 870        | 960         | 1045       | 1130        | 1215       | 1305        |                     |                 |                      |
|                | 10 LT S                                  | 980              | 1095       | 1210        | 1325       | 1440        | 1550       | 1660        | 1770                | 1825            | 2070                 |
|                | 10 HT S                                  |                  | 870        | 960         | 1045       | 1130        | 1215       | 1305        |                     |                 |                      |

|                | Size                                     | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim             | Type            | Tube                 |
|----------------|------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------|-----------------|----------------------|
| Pressure       | <b>320/85R24</b><br>122A8 119B (12.4R24) | <b>Radial 85</b> | <b>320</b> | <b>1145</b> | <b>510</b> | <b>3420</b> | <b>550</b> | <b>W11</b>  | <b>W10 - W9 DW10 DW11</b> | <b>TUBELESS</b> | <b>12.4-24 TR218</b> |
|                | <b>psi</b>                               | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                 | <b>28</b>       | <b>30</b>            |
|                | <b>bar</b>                               | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                | <b>1,9</b>      | <b>2,1</b>           |
| Max. Load (kg) | 50 S                                     |                  | 910        | 1005        | 1095       | 1185        | 1275       | 1360        |                           |                 |                      |
|                | <b>40 S</b>                              |                  | 1000       | 1100        | 1200       | 1300        | 1400       | <b>1500</b> |                           |                 |                      |
|                | 30 S                                     |                  | 1070       | 1180        | 1285       | 1395        | 1500       | 1605        |                           |                 |                      |
|                | 10 LT S                                  | 1200             | 1340       | 1480        | 1620       | 1760        | 1900       | 2040        | 2180                      | 2250            | 2550                 |
|                | 10 HT S                                  |                  | 1070       | 1180        | 1285       | 1395        | 1500       | 1605        |                           |                 |                      |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim              | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|----------------------------|-----------------|--------------------------|
| Pressure       | <b>340/85R24</b><br>125A8 122B<br>(13.6R24) | <b>Radial 85</b> | <b>355</b> | <b>1180</b> | <b>530</b> | <b>3525</b> | <b>575</b> | <b>W12</b>  | <b>W11 - DW11<br/>DW12</b> | <b>TUBELESS</b> | <b>13.6-24<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                  | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                 | <b>1,9</b>      | <b>2,1</b>               |
|                | 50 S                                        |                  | 1000       | 1105        | 1205       | 1305        | 1405       | 1500        |                            |                 |                          |
|                | <b>40 S</b>                                 |                  | 1095       | 1210        | 1320       | 1430        | 1540       | <b>1650</b> |                            |                 |                          |
| Max. Load (kg) | 30 S                                        |                  | 1175       | 1295        | 1415       | 1535        | 1650       | 1770        |                            |                 |                          |
|                | 10 LT S                                     | 1320             | 1475       | 1630        | 1785       | 1940        | 2095       | 2250        | 2400                       | 2475            | 2805                     |
|                | 10 HT S                                     |                  | 1175       | 1295        | 1415       | 1535        | 1650       | 1770        |                            |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                             | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>380/85R24</b><br>131A8 128B<br>(14.9R24) | <b>Radial 85</b> | <b>390</b> | <b>1245</b> | <b>555</b> | <b>3720</b> | <b>600</b> | <b>W12</b>  | <b>W13 - W11<br/>DW12 - DW13<br/>DW11</b> | <b>TUBELESS</b> | <b>14.9-24<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                 | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                | <b>1,9</b>      | <b>2,1</b>               |
|                | 50 S                                        |                  | 1170       | 1295        | 1420       | 1540        | 1660       | 1800        |                                           |                 |                          |
|                | <b>40 S</b>                                 |                  | 1285       | 1420        | 1555       | 1690        | 1820       | <b>1950</b> |                                           |                 |                          |
| Max. Load (kg) | 30 S                                        |                  | 1375       | 1520        | 1665       | 1810        | 1950       | 2090        |                                           |                 |                          |
|                | 10 LT S                                     | 1575             | 1755       | 1935        | 2115       | 2295        | 2475       | 2655        | 2835                                      | 2925            | 3315                     |
|                | 10 HT S                                     |                  | 1375       | 1520        | 1665       | 1810        | 1950       | 2090        |                                           |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>420/85R24</b><br>137A8 134B<br>(16.9R24) | <b>Radial 85</b> | <b>445</b> | <b>1310</b> | <b>585</b> | <b>3925</b> | <b>625</b> | <b>W15L</b> | <b>W14L<br/>DW14L<br/>DW15L</b> | <b>TUBELESS</b> | <b>16.9-24<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
|                | 50 S                                        |                  | 1385       | 1530        | 1670       | 1815        | 1955       | 2120        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 1520       | 1680        | 1835       | 1990        | 2145       | <b>2300</b> |                                 |                 |                          |
| Max. Load (kg) | 30 S                                        |                  | 1630       | 1800        | 1965       | 2130        | 2300       | 2465        |                                 |                 |                          |
|                | 10 LT S                                     | 1840             | 2055       | 2270        | 2485       | 2700        | 2915       | 3130        | 3345                            | 3450            | 3910                     |
|                | 10 HT S                                     |                  | 1630       | 1800        | 1965       | 2130        | 2300       | 2465        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                     | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-----------------------------------|-----------------|--------------------------|
| Pressure       | <b>320/85R28</b><br>124A8 121B<br>(12.4R28) | <b>Radial 85</b> | <b>325</b> | <b>1240</b> | <b>555</b> | <b>3715</b> | <b>600</b> | <b>W11</b>  | <b>W10 - W9<br/>DW10<br/>DW11</b> | <b>TUBELESS</b> | <b>12.4-28<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                         | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                        | <b>1,9</b>      | <b>2,1</b>               |
|                | 50 S                                        |                  | 960        | 1060        | 1160       | 1260        | 1360       | 1450        |                                   |                 |                          |
|                | <b>40 S</b>                                 |                  | 1050       | 1160        | 1270       | 1380        | 1490       | <b>1600</b> |                                   |                 |                          |
| Max. Load (kg) | 30 S                                        |                  | 1125       | 1245        | 1360       | 1480        | 1595       | 1715        |                                   |                 |                          |
|                | 10 LT S                                     | 1275             | 1425       | 1575        | 1725       | 1875        | 2025       | 2175        | 2325                              | 2400            | 2720                     |
|                | 10 HT S                                     |                  | 1125       | 1245        | 1360       | 1480        | 1595       | 1715        |                                   |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim              | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|----------------------------|-----------------|--------------------------|
| Pressure       | <b>340/85R28</b><br>127A8 124B<br>(13.6R28) | <b>Radial 85</b> | <b>360</b> | <b>1280</b> | <b>575</b> | <b>3815</b> | <b>625</b> | <b>W12</b>  | <b>W11 - DW11<br/>DW12</b> | <b>TUBELESS</b> | <b>13.6-28<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                  | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                 | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1050       | 1160        | 1265       | 1375        | 1485       | 1600        |                            |                 |                          |
|                | <b>40 S</b>                                 |                  | 1150       | 1270        | 1390       | 1510        | 1630       | <b>1750</b> |                            |                 |                          |
|                | 30 S                                        |                  | 1235       | 1360        | 1490       | 1620        | 1745       | 1875        |                            |                 |                          |
|                | 10 LT S                                     | 1405             | 1570       | 1735        | 1900       | 2065        | 2225       | 2385        | 2545                       | 2625            | 2975                     |
|                | 10 HT S                                     |                  | 1235       | 1360        | 1490       | 1620        | 1745       | 1875        |                            |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                             | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>380/85R28</b><br>133A8 130B<br>(14.9R28) | <b>Radial 85</b> | <b>390</b> | <b>1345</b> | <b>600</b> | <b>4020</b> | <b>650</b> | <b>W13</b>  | <b>W12 - W11<br/>DW11 - DW12<br/>DW13</b> | <b>TUBELESS</b> | <b>14.9-28<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                 | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1240       | 1365        | 1495       | 1620        | 1750       | 1900        |                                           |                 |                          |
|                | <b>40 S</b>                                 |                  | 1360       | 1500        | 1640       | 1780        | 1920       | <b>2060</b> |                                           |                 |                          |
|                | 30 S                                        |                  | 1460       | 1605        | 1755       | 1905        | 2055       | 2205        |                                           |                 |                          |
|                | 10 LT S                                     | 1660             | 1855       | 2045        | 2235       | 2425        | 2615       | 2805        | 2995                                      | 3090            | 3505                     |
|                | 10 HT S                                     |                  | 1460       | 1605        | 1755       | 1905        | 2055       | 2205        |                                           |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>420/85R28</b><br>139A8 136B<br>(16.9R28) | <b>Radial 85</b> | <b>445</b> | <b>1405</b> | <b>625</b> | <b>4200</b> | <b>675</b> | <b>W15L</b> | <b>W14L<br/>DW14L<br/>DW15L</b> | <b>TUBELESS</b> | <b>16.9-28<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1465       | 1615        | 1765       | 1915        | 2065       | 2240        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 1605       | 1770        | 1935       | 2100        | 2265       | <b>2430</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 1720       | 1895        | 2075       | 2250        | 2425       | 2605        |                                 |                 |                          |
|                | 10 LT S                                     | 1955             | 2185       | 2410        | 2635       | 2860        | 3085       | 3310        | 3535                            | 3645            | 4135                     |
|                | 10 HT S                                     |                  | 1720       | 1895        | 2075       | 2250        | 2425       | 2605        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                             | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|-------------------------------------------|-----------------|--------------------------|
| Pressure       | <b>380/85R30</b><br>135A8 132B<br>(14.9R30) | <b>Radial 85</b> | <b>385</b> | <b>1400</b> | <b>625</b> | <b>4180</b> | <b>675</b> | <b>W13</b>  | <b>W12 - W11<br/>DW11 - DW12<br/>DW13</b> | <b>TUBELESS</b> | <b>14.9-30<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                                 | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                                | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1305       | 1440        | 1575       | 1715        | 1850       | 2000        |                                           |                 |                          |
|                | <b>40 S</b>                                 |                  | 1430       | 1580        | 1730       | 1880        | 2030       | <b>2180</b> |                                           |                 |                          |
|                | 30 S                                        |                  | 1535       | 1695        | 1855       | 2015        | 2175       | 2335        |                                           |                 |                          |
|                | 10 LT S                                     | 1745             | 1950       | 2155        | 2360       | 2565        | 2770       | 2970        | 3170                                      | 3270            | 3710                     |
|                | 10 HT S                                     |                  | 1535       | 1695        | 1855       | 2015        | 2175       | 2335        |                                           |                 |                          |



|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>420/85R30</b><br>140A8 137B<br>(16.9R30) | <b>Radial 85</b> | <b>445</b> | <b>1475</b> | <b>655</b> | <b>4400</b> | <b>700</b> | <b>W15L</b> | <b>W14L<br/>DW14L<br/>DW15L</b> | <b>TUBELESS</b> | <b>16.9-30<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1505       | 1660        | 1815       | 1970        | 2125       | 2300        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 1650       | 1820        | 1990       | 2160        | 2330       | <b>2500</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 1770       | 1950        | 2130       | 2315        | 2495       | 2675        |                                 |                 |                          |
|                | 10 LT S                                     | 2000             | 2235       | 2470        | 2705       | 2940        | 3175       | 3405        | 3635                            | 3750            | 4250                     |
|                | 10 HT S                                     |                  | 1770       | 1950        | 2130       | 2315        | 2495       | 2675        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>460/85R30</b><br>145A8 142B<br>(18.4R30) | <b>Radial 85</b> | <b>485</b> | <b>1525</b> | <b>675</b> | <b>4580</b> | <b>725</b> | <b>W16L</b> | <b>W15L<br/>DW15L<br/>DW16L</b> | <b>TUBELESS</b> | <b>18.4-30<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1730       | 1915        | 2095       | 2275        | 2460       | 2650        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 1900       | 2100        | 2300       | 2500        | 2700       | <b>2900</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 2035       | 2250        | 2465       | 2675        | 2890       | 3105        |                                 |                 |                          |
|                | 10 LT S                                     | 2325             | 2595       | 2865        | 3135       | 3405        | 3675       | 3945        | 4215                            | 4350            | 4930                     |
|                | 10 HT S                                     |                  | 2035       | 2250        | 2465       | 2675        | 2890       | 3105        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>420/85R34</b><br>142A8 139B<br>(16.9R34) | <b>Radial 85</b> | <b>445</b> | <b>1575</b> | <b>705</b> | <b>4705</b> | <b>750</b> | <b>W15L</b> | <b>W14L<br/>DW14L<br/>DW15L</b> | <b>TUBELESS</b> | <b>16.9-34<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1595       | 1760        | 1925       | 2085        | 2250       | 2430        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 1750       | 1930        | 2110       | 2290        | 2470       | <b>2650</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 1875       | 2070        | 2260       | 2455        | 2645       | 2840        |                                 |                 |                          |
|                | 10 LT S                                     | 2125             | 2375       | 2625        | 2875       | 3120        | 3365       | 3610        | 3855                            | 3975            | 4505                     |
|                | 10 HT S                                     |                  | 1875       | 2070        | 2260       | 2455        | 2645       | 2840        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>460/85R34</b><br>147A8 144B<br>(18.4R34) | <b>Radial 85</b> | <b>485</b> | <b>1640</b> | <b>725</b> | <b>4915</b> | <b>775</b> | <b>W16L</b> | <b>W15L<br/>DW15L<br/>DW16L</b> | <b>TUBELESS</b> | <b>18.4-34<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1845       | 2035        | 2225       | 2420        | 2610       | 2800        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 2025       | 2235        | 2445       | 2655        | 2865       | <b>3075</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 2170       | 2395        | 2620       | 2845        | 3070       | 3295        |                                 |                 |                          |
|                | 10 LT S                                     | 2465             | 2755       | 3045        | 3335       | 3620        | 3905       | 4190        | 4475                            | 4615            | 5230                     |
|                | 10 HT S                                     |                  | 2170       | 2395        | 2620       | 2845        | 3070       | 3295        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>420/85R38</b><br>144A8 141B<br>(16.9R38) | <b>Radial 85</b> | <b>445</b> | <b>1675</b> | <b>745</b> | <b>5005</b> | <b>800</b> | <b>W15L</b> | <b>W14L<br/>DW14L<br/>DW15L</b> | <b>TUBELESS</b> | <b>16.9-38<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1685       | 1860        | 2030       | 2205        | 2380       | 2575        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 1850       | 2040        | 2230       | 2420        | 2610       | <b>2800</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 1980       | 2185        | 2390       | 2590        | 2795       | 3000        |                                 |                 |                          |
|                | 10 LT S                                     | 2250             | 2510       | 2770        | 3030       | 3290        | 3550       | 3810        | 4070                            | 4200            | 4760                     |
|                | 10 HT S                                     |                  | 1980       | 2185        | 2390       | 2590        | 2795       | 3000        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim         | Permitted Rim                   | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|-------------|---------------------------------|-----------------|--------------------------|
| Pressure       | <b>460/85R38</b><br>149A8 146B<br>(18.4R38) | <b>Radial 85</b> | <b>480</b> | <b>1735</b> | <b>765</b> | <b>5200</b> | <b>825</b> | <b>W16L</b> | <b>W15L<br/>DW15L<br/>DW16L</b> | <b>TUBELESS</b> | <b>18.4-38<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>   | <b>26</b>                       | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>  | <b>1,8</b>                      | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 1950       | 2155        | 2360       | 2560        | 2760       | 3000        |                                 |                 |                          |
|                | <b>40 S</b>                                 |                  | 2140       | 2365        | 2590       | 2810        | 3030       | <b>3250</b> |                                 |                 |                          |
|                | 30 S                                        |                  | 2290       | 2535        | 2775       | 3010        | 3245       | 3480        |                                 |                 |                          |
|                | 10 LT S                                     | 2595             | 2900       | 3205        | 3510       | 3815        | 4120       | 4425        | 4725                            | 4875            | 5525                     |
|                | 10 HT S                                     |                  | 2290       | 2535        | 2775       | 3010        | 3245       | 3480        |                                 |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim          | Permitted Rim                  | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|--------------|--------------------------------|-----------------|--------------------------|
| Pressure       | <b>520/85R38</b><br>155A8 152B<br>(20.8R38) | <b>Radial 85</b> | <b>550</b> | <b>1845</b> | <b>815</b> | <b>5525</b> | <b>875</b> | <b>DW18L</b> | <b>W16L<br/>W18L<br/>DW16L</b> | <b>TUBELESS</b> | <b>20.8-38<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>    | <b>26</b>                      | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>   | <b>1,8</b>                     | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 2325       | 2565        | 2805       | 3045        | 3290       | 3550         |                                |                 |                          |
|                | <b>40 S</b>                                 |                  | 2550       | 2815        | 3080       | 3345        | 3610       | <b>3875</b>  |                                |                 |                          |
|                | 30 S                                        |                  | 2730       | 3015        | 3300       | 3580        | 3865       | 4150         |                                |                 |                          |
|                | 10 LT S                                     | 3105             | 3470       | 3835        | 4195       | 4555        | 4915       | 5275         | 5635                           | 5815            | 6590                     |
|                | 10 HT S                                     |                  | 2730       | 3015        | 3300       | 3580        | 3865       | 4150         |                                |                 |                          |

|                | Size                                        | Tread Pattern    | SW mm      | OD mm       | SLR mm     | RC mm       | SRI        | Rim          | Permitted Rim                  | Type            | Tube                     |
|----------------|---------------------------------------------|------------------|------------|-------------|------------|-------------|------------|--------------|--------------------------------|-----------------|--------------------------|
| Pressure       | <b>520/85R42</b><br>157A8 154B<br>(20.8R42) | <b>Radial 85</b> | <b>550</b> | <b>1945</b> | <b>855</b> | <b>5825</b> | <b>925</b> | <b>DW18L</b> | <b>W16L<br/>W18L<br/>DW16L</b> | <b>TUBELESS</b> | <b>20.8-42<br/>TR218</b> |
|                | <b>psi</b>                                  | <b>6</b>         | <b>9</b>   | <b>12</b>   | <b>15</b>  | <b>17</b>   | <b>20</b>  | <b>23</b>    | <b>26</b>                      | <b>28</b>       | <b>30</b>                |
|                | <b>bar</b>                                  | <b>0,4</b>       | <b>0,6</b> | <b>0,8</b>  | <b>1,0</b> | <b>1,2</b>  | <b>1,4</b> | <b>1,6</b>   | <b>1,8</b>                     | <b>1,9</b>      | <b>2,1</b>               |
| Max. Load (kg) | 50 S                                        |                  | 2710       | 2995        | 3280       | 3565        | 3845       | 4125         |                                |                 |                          |
|                | <b>40 S</b>                                 |                  | 2710       | 2995        | 3280       | 3565        | 3845       | <b>4125</b>  |                                |                 |                          |
|                | 30 S                                        |                  | 2900       | 3205        | 3510       | 3815        | 4115       | 4415         |                                |                 |                          |
|                | 10 LT S                                     | 3305             | 3690       | 4075        | 4460       | 4845        | 5230       | 5615         | 6000                           | 6190            | 7015                     |
|                | 10 HT S                                     |                  | 2900       | 3205        | 3510       | 3815        | 4115       | 4415         |                                |                 |                          |



Printed on  
recycled paper

# MAXIMO

[WWW.MAXIMO-TYRES.COM](http://WWW.MAXIMO-TYRES.COM)



Yokohama TWS S.p.A.  
Via Nazionale Tiburtina, 143 - 00019 Villa Adriana - Tivoli (RM), Italy  
Phone: +39 0774 384701 - Fax: +39 0774 384702  
email: [info@maximo-tyres.com](mailto:info@maximo-tyres.com)